




LTE Telemetrylogger 255

Self-sufficient Datalogger with 4G / 3G / 2G cellular data transmission for the connection of water level- and water quality probes

- Efficient long-term monitoring of groundwater measuring sites
- Recording and transmission of water level and water quality parameters in lakes and rivers
- Remote monitoring of pumping tests
- Monitoring and alarm management for impending pollutions into groundwater
- For measuring sites that are difficult to access
- Enormous reduced inspection intervals

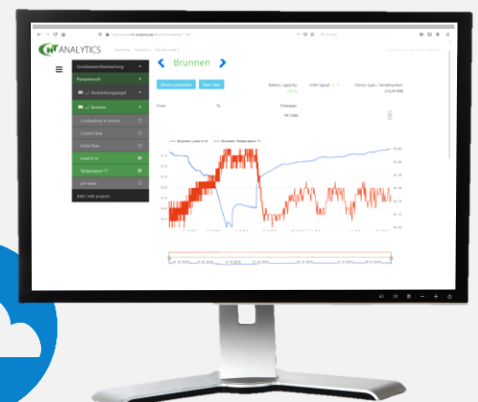



Reliable and future-proof

The LTE Telemetrylogger 255 records and transmits the data of the connected measuring probes absolutely reliable. The data are sent to a selectable FTP webserver by using the LTE 4G cellular network. In case of no available 4G network, the Telemetrylogger uses the integrated fallback to the 2G/ 3G network. The measured values and status information can easily be observed, analysed and shared with colleagues, teams or consortiums by using the cloud solution HT Analytics.

Continuous transmitted operating parameters like battery status or cellular signal supply important information for the operating conditions. Thus enables to check the measuring sites online to avoid data gaps. The LTE Telemetrylogger is maintenance-free. Means, there is no exchange of drying cartridges necessary. After a while, depends on the set transmission intervals, battery exchange can be easily done directly at site.

By using the optional alarm management, the user will be supported by extra SMS- / Email- messages and a status file on the FTP server when preset limit values are exceeded or in case of low battery.



Antenna detachable for connection of an external antenna

„To know that the data will be measured and transmitted reliable means fewer checks at site and more time for other important tasks.“

The best solution for any application

Depending on the demands, HT's LTE Telemetrylogger 255 can be equipped with the following sensors- and HT probes:

„There are various possibilities; the operation remains simple and intuitive.“

Parameters:

- Water level
- Water temperature
- Conductivity
- pH
- ORP

The parameters are available as single sensors or multiprobes



Flexible power supply – the standard version is equipped with commercially available alkaline batteries. This enables a lifetime of two years with daily data transmission and set 10 minutes measuring interval.

In cause of its small size, the LTE Telemetrylogger 255 can be fit directly in groundwater monitoring wells from 2 inch. In addition, check measurements with a Water Level Meter are possible without removing the logger. Due to the high quality and materials from stainless steel, this unit is well equipped for long-term use in rough conditions.



Technical specifications

Description	LTE Telemetrylogger 255
Cellular standards	2G, 3G and 4G LTE
Supported 4G-LTE standards	LTE Cat-1 and Cat-4
4G LTE Frequencies	B1(2100MHz); B3(1800 MHz); B7(2600 MHz); B20(800 MHz); B28(700 MHz);
Electrical data	
Measuring probe connection	Standard: 1 input for the connection of one HT measuring probe Optional: additional input for another HT measuring probe
Memory	4 MB flash memory (non-volatile) for up to 190,000 records
Measuring interval	adjustable from 1 second to 99 days
Transmission interval	adjustable from 10 minutes to 99 days
Clock accuracy	<5 minutes / year; adjusted at every data transmission by clock server
Operating interface	RS 232; approachable via serial and USB-interface as well as by Bluetooth connection when using HT's Bluetooth- stick
Remote data transmission	
Transmission protocol	Standard: FTP, optional with SSL encryption (FTPS)
File formats	ASCII and Excel standard; ZRXP; csv, MIS; Labdüs; and many more Individual formats configurable by adjustments in our software department
Alarm management (optional)	2 limits definable for every parameter Possibility for automatic switching of measuring and transmission interval Alarm message at low battery Alarm message via SMS / eMail, and alarm file on the webserver
Power supply	3 x Alkali / Size C for 2 years at daily data transmission and 10 minutes measuring interval
Antenna	Standard: integrated antenna; optional: external antenna connector
Mechanical data	
Measurements (Ø x L)	Ø 49 mm x 380 mm / suitable from 2 inch groundwater observation wells
Material	Stainless steel housing AISI 316
Environmental conditions	
Operating temperature	-25 °C to +70 °C
Protection class	IP 68; permanent seal until 1m water column No drying cartridges or silica gel necessary